


Technical Specifications

MP Mains Powered	Voltage In 100 – 240VAC 50/60Hz	Power 69W @ 230VAC	IP/IK Rating IP66 / IK09	Operating Temp.° -20°C ≤ T _{amb} ≤ 50°C
ELV Extra Low Voltage Luminaire	Voltage In 22.5 – 26VDC	Power 62W @ 24VDC	IP/IK Rating IP66 / IK09	Operating Temp.° -20°C ≤ T _{amb} ≤ 50°C

INSTALLATION INSTRUCTIONS


Step 1

Feed the cable through and slide the DLK onto the spigot.

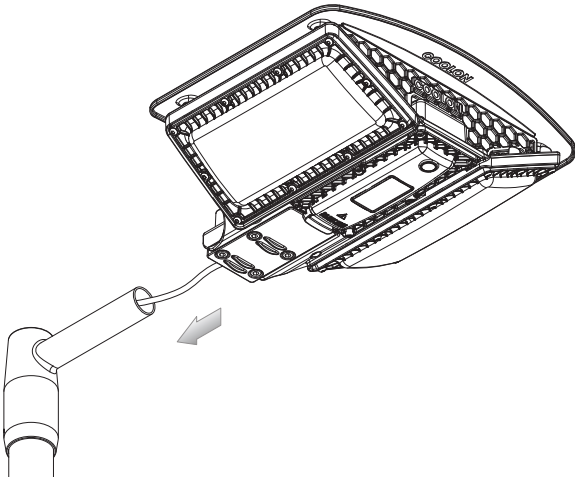


Step 2

Tighten bolts to secure luminaire to the spigot.

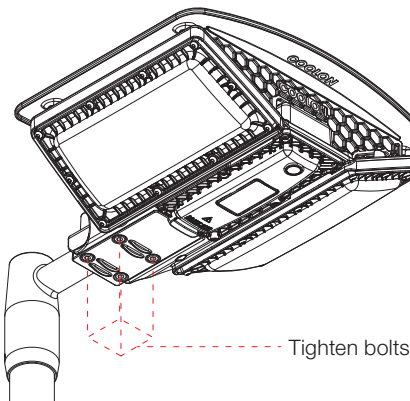


Step 3 *Optional U-Bolts

Mount the DLK to spigot by securing U-Bolts with washers and M8 tube nuts.

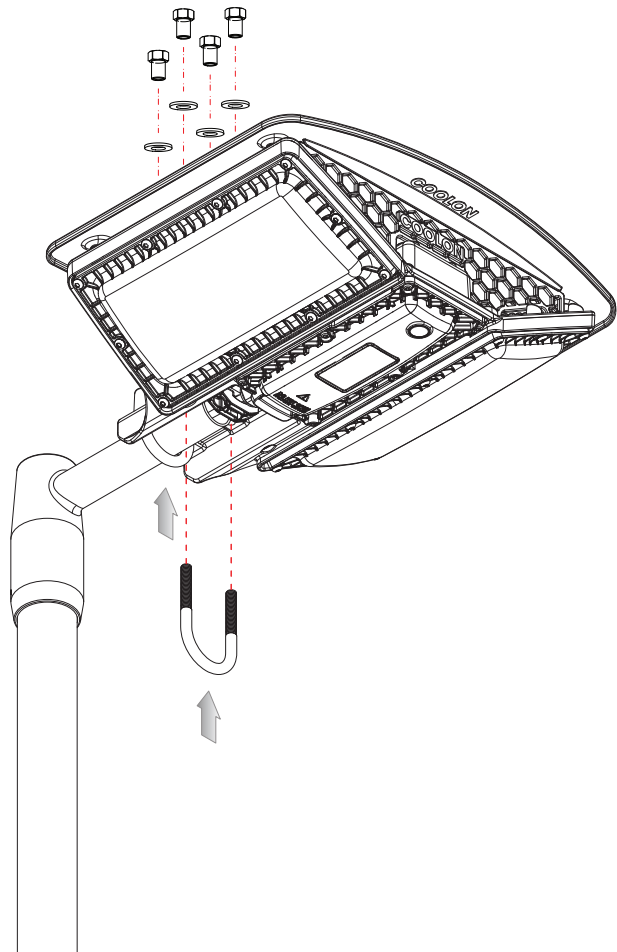


WIRING


Mains (230VAC) Version

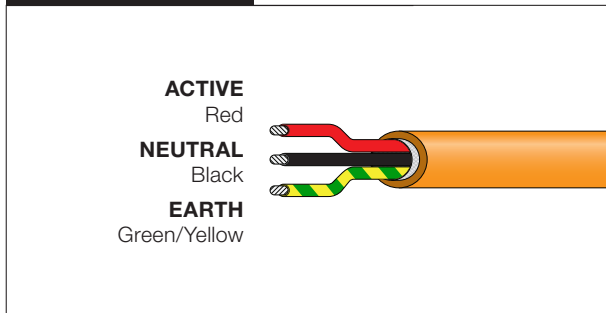

Low Voltage (24VDC) Version

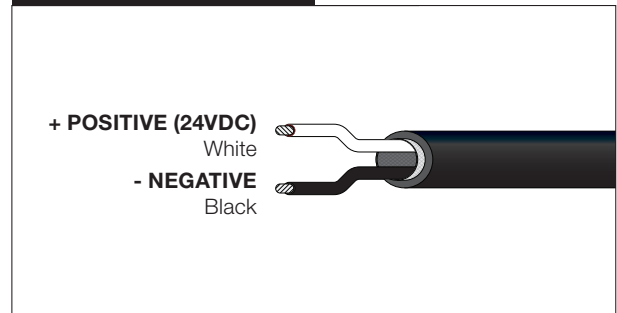

LIGHT SENSOR DIMMING

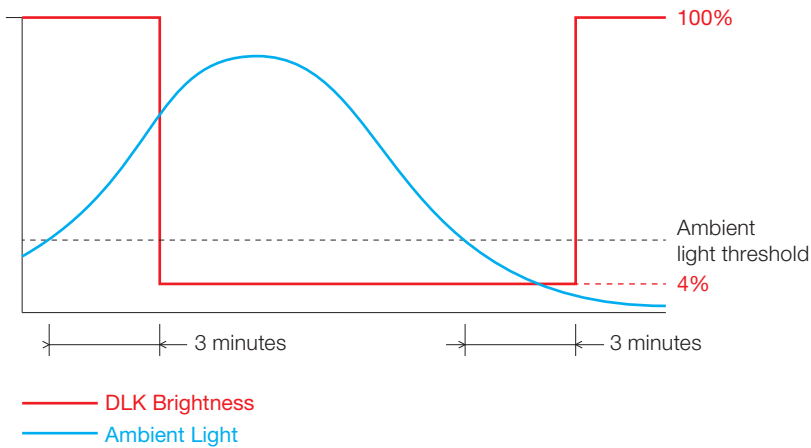

The DLK LED will be at 100% brightness when it is turned on and then will dim to 4% brightness when daylight is detected. 3 minutes after the daylight has dropped below the minimum ambient light threshold, the DLK LED will ramp up to 100% brightness. (Only applies to DLK equipped with light sensor)

! IMPORTANT

Primary use: commercial and industrial applications.

- Read through this manual before installation
- Handle the product with care
- Class I products must be grounded
- The product must be installed by a suitably qualified person
- Do not stare at operating lamp, may be harmful to the eyes
- Turn OFF the power before installation and maintenance
- Make sure the product is securely installed
- The housing might become hot after operation
- Keep optical face clean

